

Yoswit Smart Bulb Converter Datasheet

Model YO919



The Simplest Smart Home Solution

Yoswit Smart Bulb Converter is a small device that turns your ordinary light bulbs to smart bulbs. We eliminate your needs to purchase for new smart devices. You can control the light bulbs simply with your smartphone after a simple installation.

Compatible with Common Devices

We save your budget for compatible smart devices. With a simple installation, Yoswit Smart Bulb Converter can turn an ordinary light bulb smart.




High Compatibility

Worrying that our converter may not fit your bulbs? We provide 3 different bulb caps (E14, B22, E27) for you. You may choose the suitable one that fits your lamp.



Yoswit App

You can download our app and control Yoswit switches with your smart phones via Bluetooth.



Key Features and Benefits

- Simple installation
- Works with ordinary "non-smart" devices
- High compatibility with 3 bulb caps included (E14, B22, E27)
- Compatible with the entire family of Yoswit products
- Free Yoswit app
- Outdoor remote control
- Schedule timer to turn your lights on before arrival
- Free room and scene settings
- 2-year limited warranty



Product Specifications



General

Product Name	Yoswit Smart Bulb Converter
Model	YO919
Bulb Cap Type	E14, B22, E27
Bulb Holder Type	E27
EAN / UPC	EAN: 0712155479678; UPC: 712155479678
Compliance	CE, FCC, RoHS
Manufacturer	Designed by Yoswit in Hong Kong. Assembled in China.
Warranty	2 years, limited (*Details available on the Limited Warranty and Limitations sections of this datasheet)

Electrical

Input Voltage	AC100-240V
Ambient Temperature	-10°C to 50°C
Maximum Load Power	60 watts
Standby Power	<0.1 watt


Mechanical

Surface Materials	V0 flame-resistant PBT +fiberglass
Operating Environment	Indoors
Ingress Protection (IP)	20
Operating Temperature Range	-10°C to 80°C
Operating Humidity Range	0-90% relative humidity, non-condensing


Bluetooth

Product Compatibility	Bluetooth Smart Ready products
Frequency	2.4GHz
Radio Transmission Power	0~4 dBm
Bluetooth Range	Open area: >50m; indoor: 10-20m
Bluetooth Version	Bluetooth 4.0

Product Package

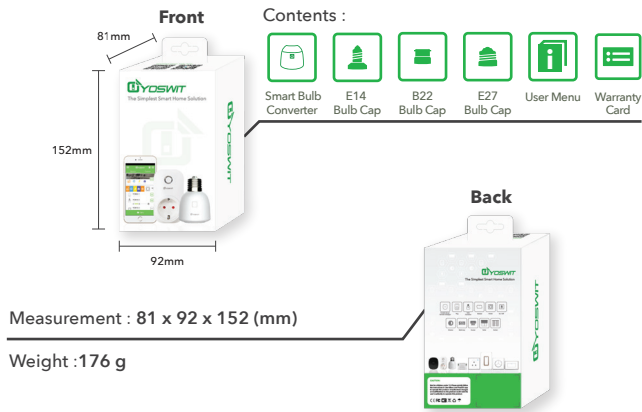

Outer box

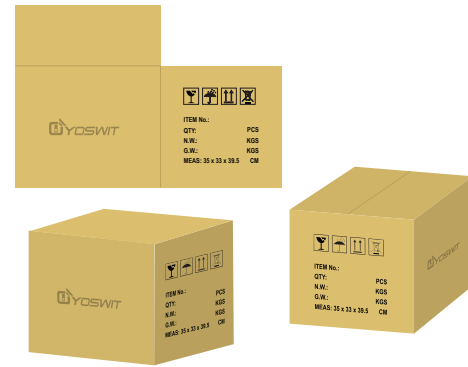

Limited Warranty

From the date of purchase, the Yoswit Smart Bulb Converter is of standard 2-year warranty only without any defects or errors caused by misuse, neglect or disassembly of the components of Yoswit Smart Bulb Converter without the permission either from Yoswit or any of our distributors. If the product does not perform as warranted above during warranty period, Yoswit will either repair or replace it upon the receipt of the with the completed warranty card or online warranty registration.

Limitations

The above limited warranty is in lieu of all other warranties. Any implied warranty should be limited to 2 years for Yoswit Smart Bulb Converter of the above written express warranty. Please strictly follow the instructions before installation and verify the state of devices manually whenever necessary. In case of disputes, Yoswit reserves the right to make the final decision.