# Yoswit Smart Outlet Datasheet

## Model YO511eu– EU Version, Socket 55



## The Simplest Smart Home Solution

Yoswit Smart Outlet is the world's only smart outlet that supports both 2-wire and 3-wire installation. It turns your ordinary wired devices to smart devices. With no hubs or routers required, you can control the plugged devices simply with your smartphone after installation.

### Market-leading Patent Solution

Our switches support both 2-wire and 3-wire installation without any hubs or routers. With this market-leading patent, we provide users a simple installation experience.



3-wire
(with neutral wire)
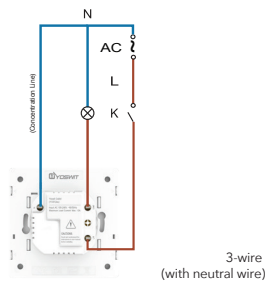
### High Compatibility

Worrying that our outlets may not fit your devices? We provide 3 different socket types for you, including US, UK and EU (not included in package). You may choose the suitable one to fit your house.

| On / Off | Dimmer | 3-way | Cooker | Roller | Curtain |

### Yoswit App

You can download our app and control Yoswit switches with your smart phones via Bluetooth.

| Outdoor remote control | Schedule timers | Rooms | Scenes | Away detection | Password protection | IFTTT |

## Key Features and Benefits

- 2-wire and 3-wire installation compatible
- Replacement of all your wall outlets
- Works with ordinary "non-smart" devices
- Compatible with the entire family of Yoswit products
- Free Yoswit app
- Outdoor remote control
- Schedule timer to turn your devices on before arrival
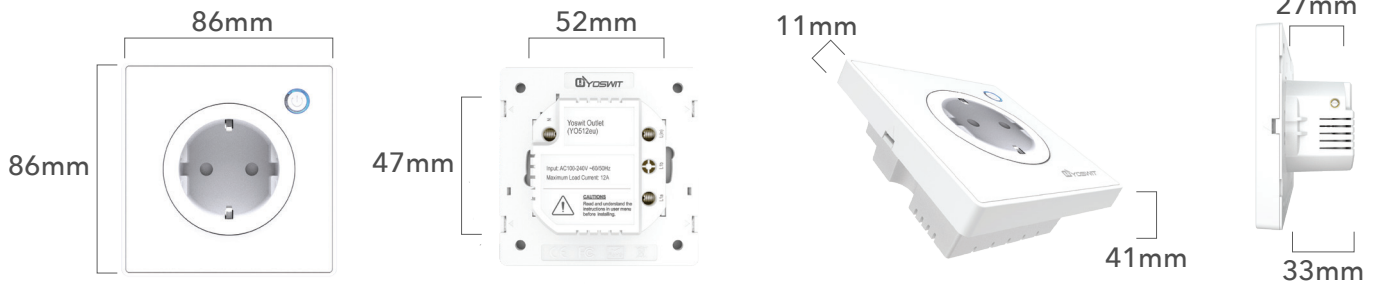- Free room and scene settings
- 2-year limited warranty

ANDROID APP ON Google play

Available on the App Store

# Product Specifications

## Specifications:



## General

| | |
|---|---|
| **Product Name** | Yoswit Smart Outlet |
| **Model** | YO512eu |
| **Outlet Version** | EU |
| **Socket Type** | Socket 55 |
| **EAN / UPC** | EAN: 0712155479791; UPC: 712155479791 |
| **Revision** | V1 |
| **Compliance** | CE, FCC, RoHS |
| **Manufacturer** | Designed by Yoswit in Hong Kong. Assembled in China. |
| **Warranty** | 2 years, limited (*Details available on the Limited Warranty and Limitations sections of this datasheet) |

## Electrical

| | |
|---|---|
| **Input Voltage** | AC100-240V |
| **Frequency** | 50/60Hz Auto Detected at Power-Up |
| **Standby Power** | <0.1 watt |
| **Operating Temperature** | -10°C to 40°C |
| **Resistive Load Current** | 13A |
| **Inductive Load Current** | 5A |

## Mechanical

| | |
|---|---|
| **Surface Materials** | V0 flame-resistant PC +ABS |
| **Storage Conditions** | -20°C to 60°C |
| **Operating Environment** | Indoors |
| **Ingress Protection (IP)** | 20 |

## Bluetooth

| | |
|---|---|
| **Product Compatibility** | Bluetooth Smart Ready products |
| **Frequency** | 2.4GHz |
| **Radio Transmission Power** | 0~5 dBm |
| **Bluetooth Range** | Open area: >50m; indoor: 10-20m |
| **Bluetooth Version** | Bluetooth 4.2 |

# Product Package

**Front**

52.5mm

111mm

143mm

Measurement : **111 x 143 x 52.5 (mm)**

Weight : **176 g**

**Back**

Contents :

Smart Outlet  Screw  User Menu  Warranty Card

# Outer box

Quantity Per Box :  **40 pack/box**
Measurement :  **58 x 31 x 23.5 (cm)**
Weight :  **7.54 kg**
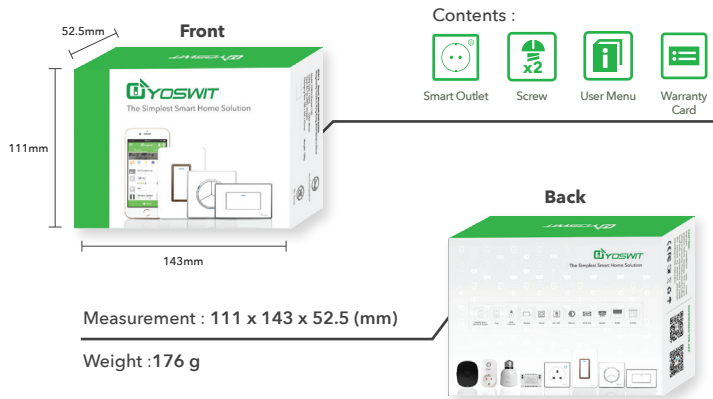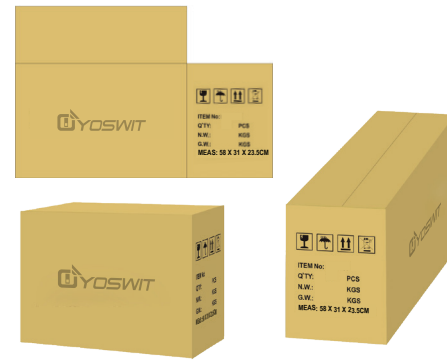
# Limited Warranty

From the date of purchase, the Yoswit Smart Outlet is of standard 2-year warranty only without any defects or errors caused by misuse, neglect or disassembly of the components of Yoswit Smart Outlet without the permission either from Yoswit or any of our distributors.
If the product does not perform as warranted above during warranty period, Yoswit will either repair or replace it upon the receipt of the with the completed warranty card or online warranty registration.

# Limitations

The above limited warranty is in lieu of all other warranties. Any implied warranty should be limited to 2 years for Yoswit Smart Outlet of the above written express warranty. Please strictly follow the instructions before installation and verify the state of devices manually whenever necessary.
In case of disputes, Yoswit reserves the right to make the final decision.