



### **Yoswit Smart 3-way Switch Datasheet**

Model YO823m - 1 Gang, Socket 118




### **The Simplest Smart Home Solution**

Yoswit Smart 3-way Switch is the world's only smart switch that supports both 2-wire and 3-wire installation. With no hubs or routers required, Yoswit switches works with a multi-functional app to provide users the simplest smart home solution with Bluetooth mesh-like network and outdoor remote control.

#### **Market-leading Patent Solution**

Our switches support both 2-wire and 3-wire installation without any hubs or routers. With this market-leading patent, we provide users a simple installation experience.



### Various Customized Products

We have more than 30 models of switches, with 4 socket types (type 55, 86, 118, 120) for each model, including smart light switch, cooker switch, dimmer switch, 3-way switch and curtain/roller switch.



### Yoswit App

You can download our app and control Yoswit switches with your smart phones via Bluetooth.



#### **Key Features and Benefits**

- 2-wire and 3-wire installation compatible
- Works with common 3-way switches of other brands
- Replacement of all your wall switches
- Compatible with the entire family of Yoswit products
- Free Yoswit app
- Outdoor remote control
- Schedule timer to preset the lights before arrival
- Free room and scene settings
- 2-year limited warranty




#### LINCOGN TECHNOLOGY CO. LIMITED

Address: Unit 315A, 3/F, Enterprise Place, No. 5 Science Park West Avenue, Hong Kong Science Park, Shatin, N.T., Hong Kong info@yoswit.com | Tel: (852) 3996 9396 | Fax: (852) 3119 8778 | www.yoswit.com

# **Product Specifications**

Color Optic	ons :					Butto	
<u>Plastic color</u>				*'	You can also cust	omize the colors	Plate
White	Pink	Orange	Yellow	Green	Aquamarine	Blue	Black
Pink Mix	Orange Mix	Yellow Mix	Green Mix	Aquamarine Mix	Blue Mix	Black Mix	
<u>Metallic color</u>							
Sliver	Gold	Brown	Space Gray	Sliver Mix	Gold Mix	Brown Mix	Space Gray Mix

### **Specifications:**

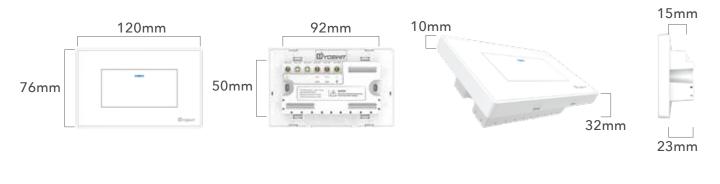

-10 to 40°C 0-90% relative humidity Operation Condition		Ū	Ï					<i>いい</i> 
AC100-240V 50/60Hz Auto Detected at Power-Up	Incandescent lamp	Halogen Iamps	Fluorescent lamps with conventional ballast	CFL	LED (CC)	LED (RC)	Ventilators	Heaters
Standby Power <0.1 Watt			bundst					
Max	6A	6A	ЗA	3A	2A	2A	2A	6A
Min	N/A			3 watts (ea	ach bulb) *	N/	A	

\* For 2-wire (without neutral wire) installation only. Please wire the LED power stabilizer if it is required to work with LED bulbs in 3 watts below when you encountered conditions of circuit instability, lightings gleaming or no light.

General	
Product Name	Yoswit Smart 3-way Switch
Model	YO823m
Gang Type	2 gang
Socket Type	Socket 118
EAN / UPC	EAN: 0712155479487; UPC: 712155479487
Revision	V2
Compliance	ETL, FCC, RoHS
Manufacturer	Designed by Yoswit in Hong Kong. Assembled in China.
Warranty	2 years, limited (*Details available on the Limited Warranty and Limitations sections of this datasheet)


### **Mechanical**

Surface Materials	V0 flame-resistant PC +ABS
Storage Conditions	$-20^{\circ}$ C to $60^{\circ}$ C
Operating Environment	Indoors
Ingress Protection (IP)	20

### Bluetooth

Product Compatibility	Bluetooth Smart Ready products
Frequency	2.4GHz
Radio Transmission Power	0~5 dBm
Bluetooth Range	Open area: >50m; indoor: 3-20m
Bluetooth Version	Bluetooth 4.2

# Product Package

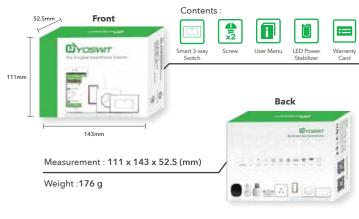

### Outer box



# **Limited Warranty**

From the date of purchase, the Yoswit Smart 3-way Switch is of standard 2-year warranty only without any defects or errors caused by misuse, neglect or disassembly of the components of Yoswit Smart 3-way Switch without the permission either from Yoswit or any of our distributors.

If the product does not perform as warranted above during warranty period, Yoswit will either repair or replace it upon the receipt of the with the completed warranty card or online warranty registration.

## **Limitations**

The above limited warranty is in lieu of all other warranties. Any implied warranty should be limited to 2 years for Yoswit Smart 3-way Switch of the above written express warranty. Please strictly follow the instructions before installation and verify the state of devices manually whenever necessary. In case of disputes, Yoswit reserves the right to make the final decision.