


Yoswit Smart Dimmer Switch Datasheet

Model YO811d - Socket 120

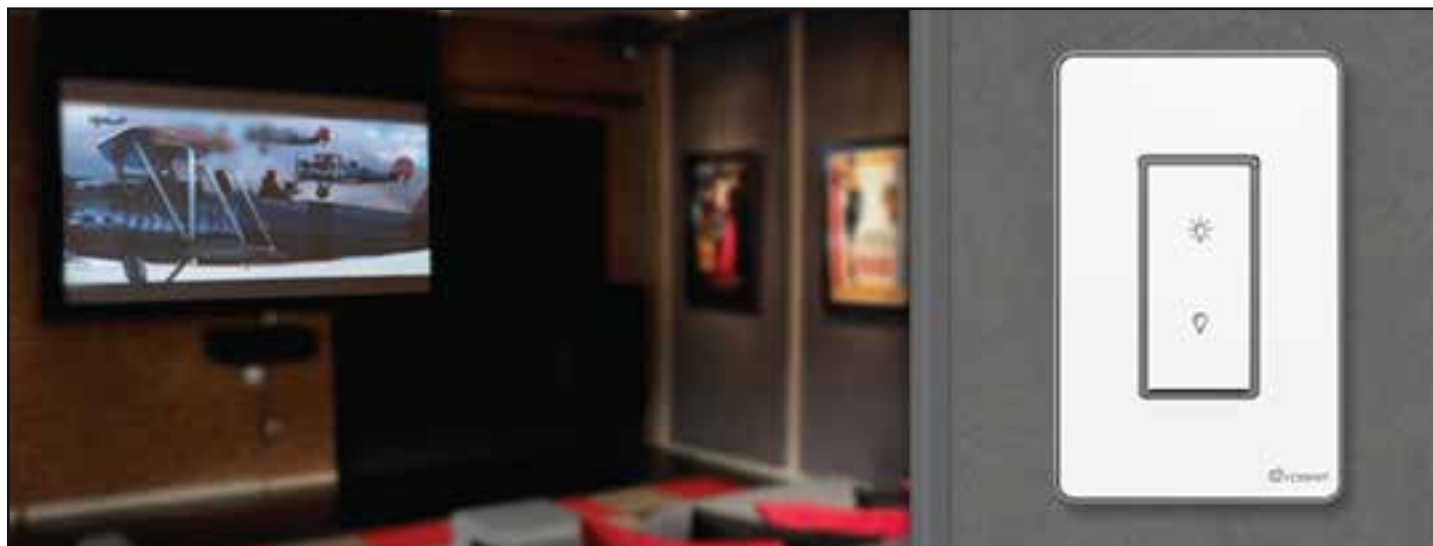


The Simplest Smart Home Solution

Yoswit Smart Dimmer Switch is the world's only smart switch that supports both 2-wire and 3-wire installation. With no hubs or routers required, Yoswit switches works with a multi-functional app to provide users the simplest smart home solution with Bluetooth mesh-like network and outdoor remote control.

Market-leading Patent Solution

Our switches support both 2-wire and 3-wire installation without any hubs or routers. With this market-leading patent, we provide users a simple installation experience.

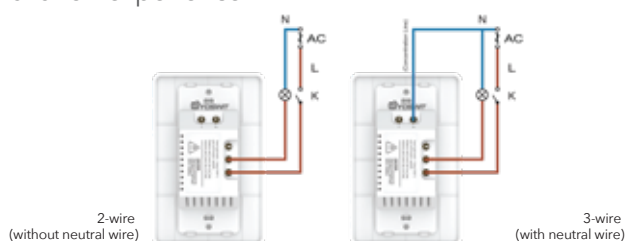

Various Customized Products

We have more than 30 models of switches, with 4 socket types (type 55, 86, 118, 120) for each model, including smart light switch, cooker switch, dimmer switch, 3-way switch and curtain/roller switch.



On / Off



Dimmer



3-way



Cooker



Roller



Curtain

Yoswit App

You can download our app and control Yoswit switches with your smart phones via Bluetooth.



Outdoor remote control



Schedule timers



Rooms



Scenes



Away detection



Password protection



IFTTT

Key Features and Benefits

- 2-wire and 3-wire installation compatible
- Simple control of dimmers with a long press
- Lock button available
- Replacement of all your wall switches
- Compatible with the entire family of Yoswit products
- Free Yoswit app
- Outdoor remote control
- Schedule timer to preset the dimmers before arrival
- Free room and scene settings
- 2-year limited warranty



Product Specifications

Color Options :

Plastic color



White



Pink



Orange



Yellow



Green



Aquamarine



Blue



Black



Pink Mix



Orange Mix



Yellow Mix



Green Mix



Aquamarine Mix



Blue Mix



Black Mix

Metallic color



Sliver



Gold



Brown



Space Gray



Sliver Mix




Gold Mix



Brown Mix




Space Gray Mix



*You can also customize the colors

Specifications:

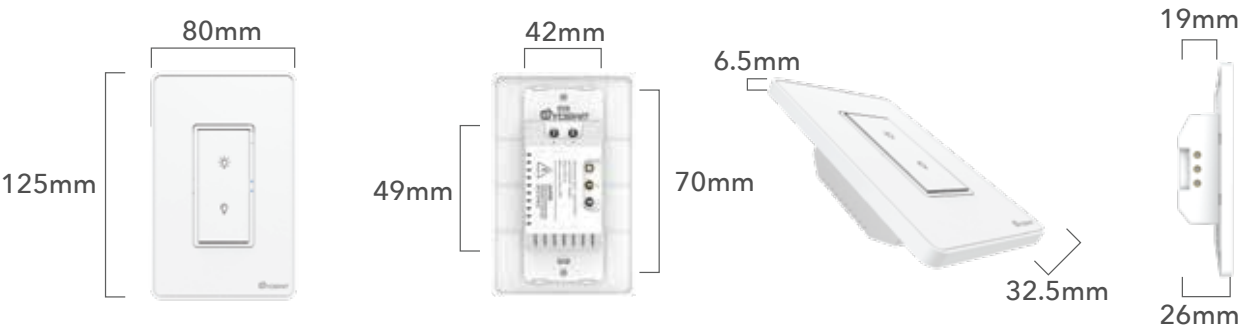

<div>-10 to 40°C 0-90% relative humidity</div> <div></div> <div>Operation Condition</div>	<div></div> <div>Incandescent lamp</div>	<div></div> <div>Halogen lamps</div>	<div></div> <div>TRIAC dimmable fluocompact lamps</div>	<div></div> <div>LED (CC) - TRIAC dimmable</div>	<div></div> <div>LED (RC) - TRIAC dimmable</div>	<div></div> <div>Fan</div>
<div>Standby Power <0.1 Watt</div>						
<div>Max Load</div>	<div>400 watts</div>					

General

Product Name	Yoswit Smart Dimmer Switch
Model	YO811d
Gang Type	1 gang
Socket Type	Socket 120
EAN / UPC	EAN: 0712155479449; UPC: 712155479449
Revision	V2
Compliance	CE, FCC, RoHS
Manufacturer	Designed by Yoswit in Hong Kong. Assembled in China.
Warranty	2 years, limited (*Details available on the Limited Warranty and Limitations sections of this datasheet)


Mechanical

Surface Materials	V0 flame-resistant PC +ABS
Storage Conditions	-20°C to 60°C
Operating Environment	Indoors
Ingress Protection (IP)	20

Bluetooth

Product Compatibility	Bluetooth Smart Ready products
Frequency	2.4GHz
Radio Transmission Power	0~5 dBm
Bluetooth Range	Open area: >50m; indoor: 3-20m
Bluetooth Version	Bluetooth 4.2

Product Package

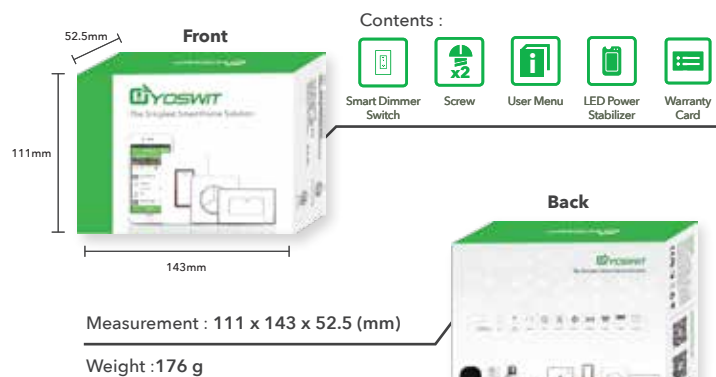

Outer box



Limited Warranty

From the date of purchase, the Yoswit Smart Dimmer Switch is of standard 2-year warranty only without any defects or errors caused by misuse, neglect or disassembly of the components of Yoswit Smart Dimmer Switch without the permission either from Yoswit or any of our distributors.

If the product does not perform as warranted above during warranty period, Yoswit will either repair or replace it upon the receipt of the with the completed warranty card or online warranty registration.

Limitations

The above limited warranty is in lieu of all other warranties. Any implied warranty should be limited to 2 years for Yoswit Smart Dimmer Switch of the above written express warranty. Please strictly follow the instructions before installation and verify the state of devices manually whenever necessary. In case of disputes, Yoswit reserves the right to make the final decision.